


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.

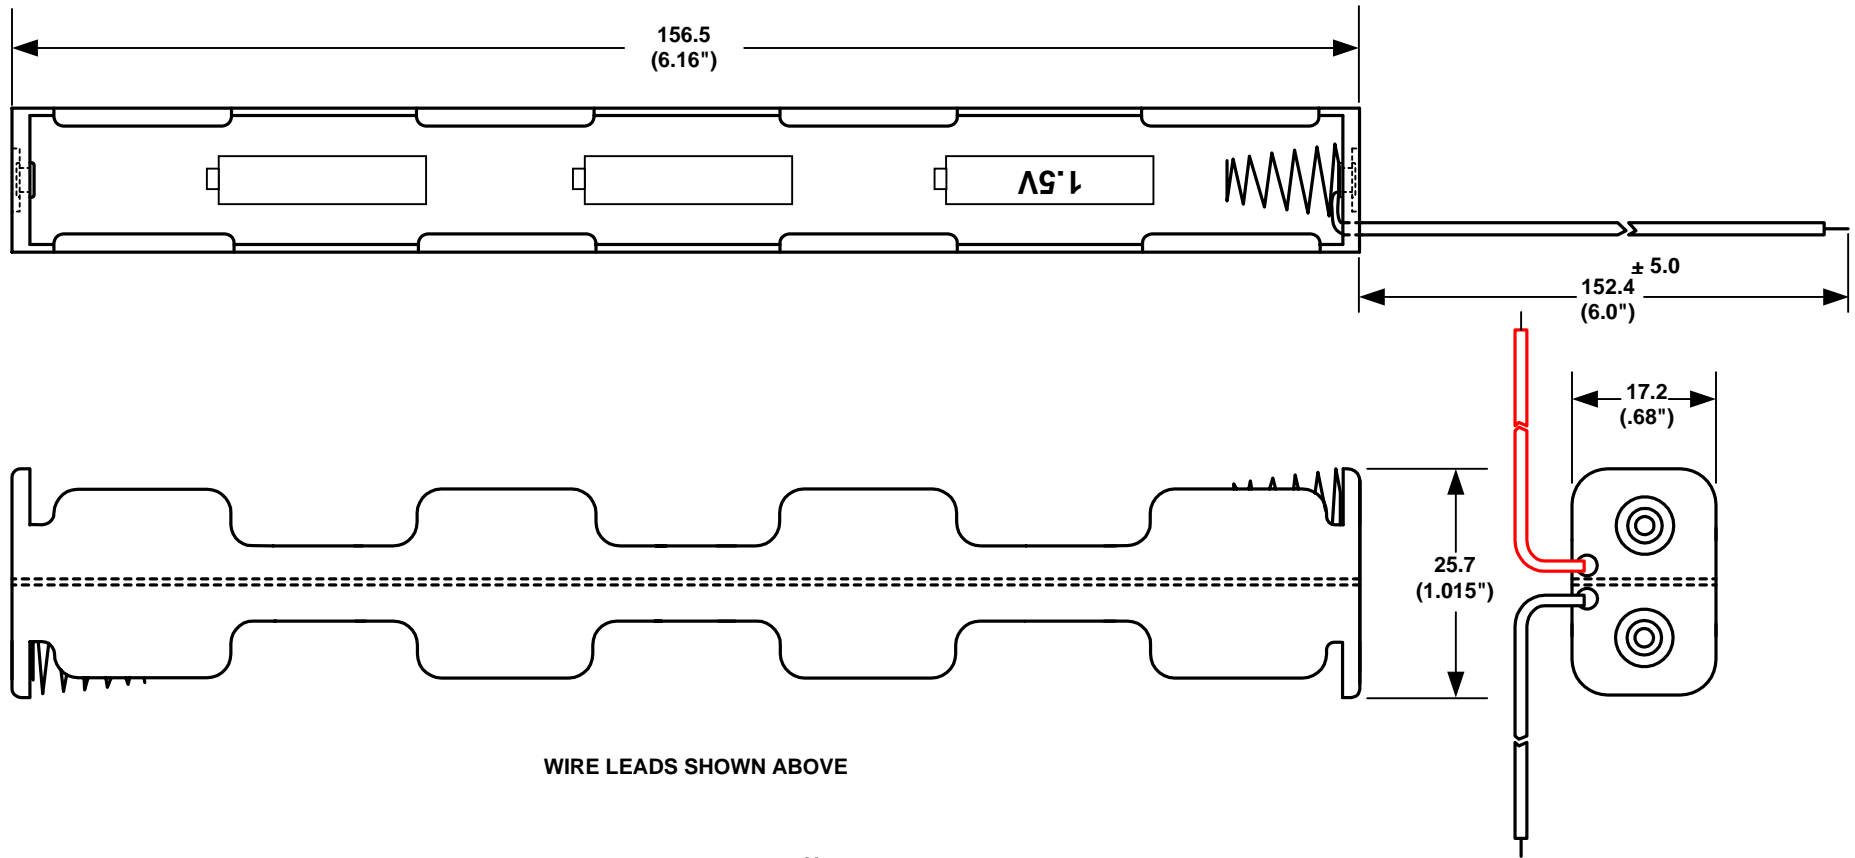

WIRE LEADS SHOWN ABOVE


ORDERING CODE **BH16AA**

**SPECIFICATIONS :**

- Plastic material - polypropylene
- Springs - nickel plated spring steel
- Wire - 152.4 mm Ref. Long 26 AWG, UL1007, CSA - TR-64, 300V, 80°C.
- Rivets - Brass, nickel plated
- 9 Volts Snaps - Brass, nickel plated

<b>SOLDER LUGS</b>	<b>= L</b>
<b>(6") WIRE LEADS</b>	<b>= W</b>
<b>9 VOLT TYPE SNAPS</b>	<b>=SF</b>

Note: Dimensions in mm. ( inches )

TOLERANCES (EXCEPT AS NOTED)		 <b>Memory Protection Devices, Inc.</b> 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL	+ .5 (.020") - .5 (.020")	SCALE	DRAWN BY S.C.
FRACTIONAL		NONE	APPROVED BY
ANGULAR	+ 3° - 3°	TITLE: <b>SIX "AA" CELL HOLDER</b> DATE: 05/10/2001 DRAWING NUMBER: <b>BH16AAW</b>	